


SMA[Ⓚ] TYPE SPRING MOUNT

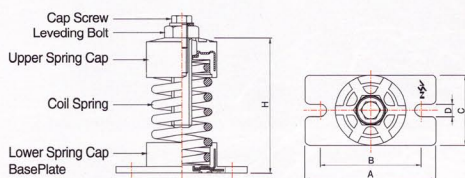

► Features

- Free standing spring mount normally used with structural steel base(Inertia).
- Set up easily, and static displacement of spring can be visually checked easily.


► Usage

- Vibration-proofing for pumps
- For blowers & fans
- For any equipment with low horizontal reaction

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Spring Constant (kgf/mm)	Weight (kg)	Color	Dimension(mm)						
					A	B	C	D	H	Leveling Bolt	Cap Screw
SMA-A-50	50	2.0	0.80	Red	90	76	60	11	105	M16 × 65	M10 × 25
SMA-A-75	75	3.0	1.00	Black							
SMA-A-100	100	4.0	1.10	Blue							
SMA-B-100	100	4.0	1.20	Blue	130	100	70	13	135	M20 × 90	M12 × 25
SMA-B-150	150	6.0	1.30	Brown							
SMA-B-200	200	8.0	1.40	White							
SMA-B-300	300	12.0	1.50	Orange							
SMA-B-400	400	16.0	1.80	Pink							
SMA-C-500	500	20.0	2.00	Green	150	120	84	13	150	M20 × 90	M12 × 25
SMA-C-600	600	24.0	2.10	Blue							
SMA-C-750	750	30.0	2.20	Black							
SMA-C-1000	1000	40.0	2.30	Yellow							
SMA-C-1200	1200	48.0	2.40	Red							

2FSA TYPE SPRING MOUNT

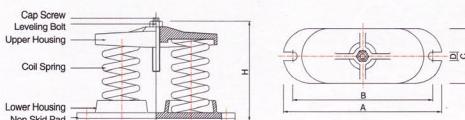

► Features

- Free standing spring mount with additional load base.
- Easy to install
- Visually checked spring static deflection.
- Left-and-right stability and high efficiency.


► Usage

- Vibration-proofing for pumps
- For air handling units
- For blowers & fans
- For any equipment with low horizontal reaction

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Spring Constant (kg/mm)	Weight (kg)	Color	Dimension(mm)						
					A	B	C	D	H	Leveling Bolt	Cap Screw
2FSA - 1000	1,000	40.0	5.80	Green	252	218	97	14	168	M20X90	M12X25
2FSA - 1200	1,200	48.0	6.30	Blue							
2FSA - 1500	1,500	60.0	6.50	Black							
2FSA - 2000	2,000	80.0	6.80	Yellow							
2FSA - 2400	2,400	96.0	7.20	Red							

FSA2 TYPE SPRING MOUNT

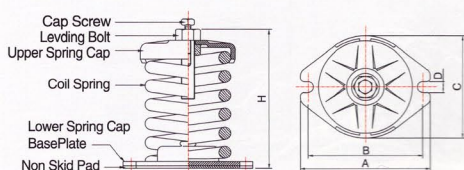

► Features

- Easy to install, allows easy inspection since the spring deflection can be visually checked.
- With a spring deflection of 50mm, mainly used for air handling unit and fans installed in buildings above ground floor.

► **Usage.**

- Vibration-proofing for riser pipes
- For air blowers (buildings above ground floor), highly efficient.
- For air handling units (above ground floor)
- For other equipment to make noiseless operating required

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Spring Constant (kgf/mm)	Weight (kg)	Color	Dimension(mm)						
					A	B	C	D	H	Leveling Bolt	Cap Screw
FSA2-A-50	50	1.0	2.3	Red	150	123	106	14	172	M20 ×90	M12 × 25
FSA2-A-100	100	2.0	2.4	Blue							
FSA2-A-150	150	3.0	2.6	Brown							
FSA2-A-200	200	4.0	2.7	White							
FSA2-A-300	300	6.0	2.9	Orange							
FSA2-A-400	400	8.0	3.0	Pink							
FSA2-A-500	500	10.0	3.1	Green							
FSA2-A-600	600	12.0	3.2	Blue							
FSA2-A-750	750	15.0	3.4	Black							
FSA2-A-1000	1,000	20.0	3.6	Yellow							
FSA2-B-1200	1,200	24.0	7.7	Red	190	170	138	14	254	M20 ×90	M12 × 25
FSA2-B-1500	1,500	30.0	8.0	Black							
FSA2-B-1800	1,800	36.0	8.2	Blue							
FSA2-B-2000	2,000	40.0	8.5	Yellow							
FSA2-C-2500	2,500	50.0	14.5	Brown	214	184	162	14	289	M24 ×110	M12 × 40
FSA2-C-3000	3,000	60.0	16.1	White							
FSA2-C-4000	4,000	80.0	18.0	Orange							